

CUFF



SHROUD




NOTE
The ML (Medium/Large) size fits most people; the SM (Small) size is for individuals with very small head sizes.

Assemble and Don Battery and Belt



1. Place a fully charged Battery's over the Belt with the Clip Detent touching the Clip, Metal-to Metal.

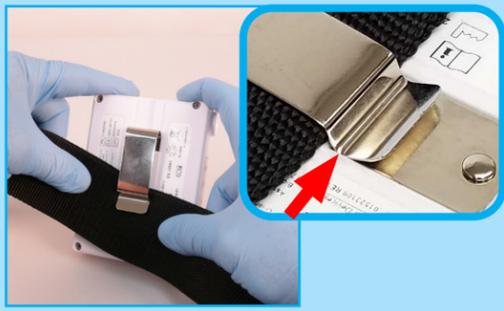


2. Place the Belt comfortably around the waist with the Battery near the side-back of the right hip and lock the buckles together.

Assemble The Cuff or Shroud to The Helmet



1. Align FCC front TurnClip horizontally, snap Lens Front Alignment Hole over TurnClip, place TurnClip vertically locking Lens in place.

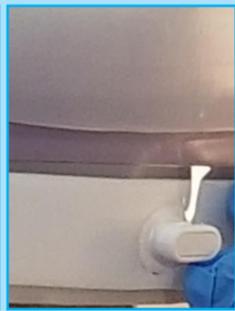

2. Snap one Lens Side Attachment Hole over FCC Side Attachment Post. Repeat for other side.



3. Pull Lens Peel Tab up and across to remove Lens Protective Cover from Lens.

Don the Assembled Helmet and Headcover



1. Connect Power Cord to Battery.



2. Loosen Headband Ratchet Knob for easy placement on Head.



3. Pull top edge of Cuff down and place Chin into Cuff, pull Helmet down onto Head.



4. Slide fingers between Cuff and face from temples down to position Cuff.¹

Complete Donning



1. Tighten Headband Knob securely comfortable for all activities.



2. SHROUDS ONLY: Pull Shroud Body down over Shoulders.



3. FOR DOUBLE SHROUD: Tuck inner Shroud Body inside outer Gown.



4. With Shroud Body fully down secure Neck and Body ties.


Doff and Disassembly

Reverse Donning and Assembly steps. Disconnect Battery from Helmet Power Cord
Connect Battery to Charger.



Ready for Next Use

Dispose of single use items per institutional protocol for contaminated waste.
Wipe down all reusable item surfaces with alcohol based wipes.

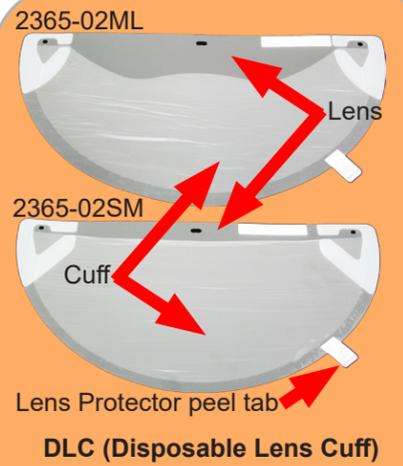


2260-05 Single Shroud



2261-01 Double Shroud



¹ Ensure less than one-half inch between Eyebrows and Helmet front bottom so Safety LEDs are easily seen.

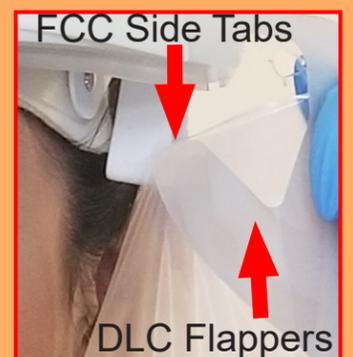

¹ DLC Flappers must be in front of FCC Side Tabs



¹ Ensure slight tension between Face and Cuff, or use SM size.